

jc715 U.S. PTO
05/30/00

Patent
Attorney's Docket No. 040071-134

jc586 U.S. PTO
09/580632
05/30/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Sven MATTISSON, Hans HAGBERG and Magnus NILSSON for LINEAR DEAD-BAND-FREE DIGITAL PHASE DETECTION.

Also enclosed are:

- ☒ 14 sheet(s) of ☐ formal ☒ informal drawing(s);
- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to __
filed in __ on __;
☐ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a General Authorization for Petitions for Extensions of Time and Payment of Fees;
- ☐ _____ statement(s) claiming small entity status;
- ☒ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: _____
- ☒ An ☒ executed ☐ unexecuted declaration of the inventor(s)
☒ also is enclosed ☐ will follow.
- ☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to __ filed in __ on __; the entire content of which is hereby incorporated by reference.--
- ☐ A bibliographic data entry sheet is enclosed.



21839

☒ The filing fee has been calculated as follows [] and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$690.00 (101)
Total Claims	22	MINUS 20 =	2	x \$18.00 (103)	36.00
Independent Claims	4	MINUS 3 =	1	x \$78.00 (102)	78.00
If multiple dependent claims are presented, add \$260.00 (104)					0
Total Application Fee					804.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					0
Add Assignment Recording Fee if Assignment document is enclosed					40.00
TOTAL APPLICATION FEE DUE					\$844.00

[] This application is being filed without a filing fee. Issuance of a Notice to File Missing Parts of Application is respectfully requested.

☒ A check in the amount of \$ 844.00 is enclosed for the fee due.

[] Charge \$ _____ to Deposit Account No. 02-4800 for the fee due.

☒ The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.

Please address all correspondence concerning the present application to:

Ronald L. Grudziecki, Esquire
Burns, Doane, Swecker & Mathis, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.


Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date:

May 30, 2000

By:

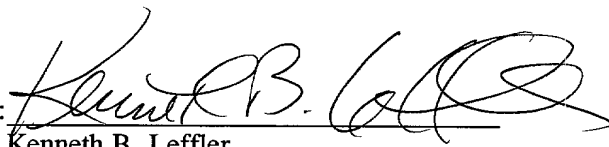
Kenneth B. Leffler
Registration No. 36,075

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

APPLICATION FOR UNITED STATES LETTERS PATENT

FOR

LINEAR DEAD-BAND-FREE DIGITAL PHASE DETECTION

by

**SVEN MATTISSON
HANS HAGBERG
and
MAGNUS NILSSON**

**BURNS, DOANE, SWECKER & MATHIS, L.L.P.
POST OFFICE BOX 1404
ALEXANDRIA, VIRGINIA 22313-1404
(703) 836-6620
Attorney's Docket No. 040071-134**

LINEAR DEAD-BAND-FREE DIGITAL PHASE DETECTION

BACKGROUND

The present invention relates frequency synthesizers and direct modulation, more particularly to phase locked loops, and even more particularly to digital phase detectors for use in a phase locked loop.

Phase locked loops (PLLs) are well known, and are useful for generating oscillating signals in many types of circuits, including but not limited to radio circuitry. In digital communication systems, for example in mobile telephone communications operating under the GSM or DCS systems, PLLs may be employed to effect continuous phase modulation (CPM) of a carrier signal.

FIG. 1 is a block diagram of a conventional integer-divide PLL 100. A phase detector 101 compares the phase of a signal supplied by a reference oscillator 103 with the phase of a feedback signal supplied by a frequency divider 105. The output of the phase detector, which represents the phase difference between the two input signals, is filtered by a filter 107. The filtered output is then used to control the frequency of an output signal generated by a voltage controlled oscillator (VCO) 109. The output signal from the VCO 109, in addition to being supplied as an output from the PLL, is also supplied as an input to the frequency divider 105, and is thus the source of the feedback source. The PLL 100 is governed by the following equations:

$$\begin{aligned} i_e &= K_P \left(\phi_R - \frac{\phi_o}{N} \right) \\ \phi_o &= i_e Z(s) \frac{K_V}{s}, \end{aligned} \tag{1}$$

where s , K_p , $Z(s)$, and K_v are the complex frequency, phase detector gain, loop-filter trans-impedance, and VCO gain, respectively, and ϕ_R , ϕ_o , and i_e , are the reference phase (or frequency as $2\pi f = s\phi$), the VCO phase, and the phase-detector error current, respectively.

5 Solving the above equations for ϕ_o yields the well-known result that $f_o = N \cdot f_R$, that is, the VCO frequency is an integer multiple of the reference frequency.

10 Since the loop response time to a change in N (e.g., when a new channel is selected) is proportional to $1/f_R$ (i.e., it takes a certain number of reference cycles to settle) and the minimum channel spacing equals f_R , there is a conflict in the choice of reference frequency. That is, it would be desirable to set a low value for f_R to reduce the minimum channel spacing. However, such a setting would result in a larger loop response time, which is undesirable.

15 To get around the above restriction on channel spacing, fractional-N PLLs have been devised. By employing a variable-modulus divider, rather than an integer divider, it is possible to achieve more flexible divide ratios. For example, performing three successive divisions by 20 followed by one division by 21 results in an average division factor of $(3 \cdot 20 + 21)/4 = 20.25$ and a channel spacing of $f_R/4$. Due to the repetitive nature of this variable modulus division, however,
20 spurious tones will be generated (here at $f_o \pm n \cdot f_R$) that will modulate the VCO.

25 Recently, $\Delta\Sigma$ modulators have been employed to shape the spurious response of the fractional-N divider. A graph depicting a typical $\Delta\Sigma$ noise density distribution is depicted in FIG. 2. The spurious tone is replaced by a spectrum of spurious tones with most of the spurious energy pushed out in frequency, well beyond the bandwidth of the PLL, essentially being centered around $f_R/2$, where f_R is the clocking rate of the $\Delta\Sigma$ modulator. A thermal noise floor (e.g., thermal noise attributable to the divider circuitry) is also included. As a result of the shaping performed by the $\Delta\Sigma$ modulator, this spurious energy will have a substantially reduced effect on the output signal from the PLL.

An exemplary embodiment of a $\Delta\Sigma$ fractional-N PLL 200 is depicted in FIG. 3. The phase detector 201, reference oscillator 203, filter 207 and VCO 209 are analogous to those counterpart elements described with respect to FIG. 1, and therefore need not be described here in detail. The frequency divider 205 in this case is capable of dividing by any integer modulus in the range $N \pm M$, and has two inputs: one for receiving a value for N , and another for receiving a value of M . By appropriately varying the value of M as described above, an effective division modulus of $N + \delta N$ can be achieved. A $\Delta\Sigma$ modulator 211 is provided that receives a desired channel value, and generates therefrom appropriate values for N and M . In the exemplary embodiment, a first-order $\Delta\Sigma$ modulator is shown, but this is not essential.

The $\Delta\Sigma$ noise will be suppressed by the loop response (i.e., if the loop bandwidth is not too wide), but to avoid spurious tones due to $\Delta\Sigma$ -modulator limit cycles (i.e., a repetitive behavior associated with having a period time that is too short), extra noise ("dither") is typically added to further randomize the $\Delta\Sigma$ noise. This is modeled in FIG. 3 by the summing circuit 213 that adds a dither value to the $\Delta\Sigma$ noise. The resultant value is then quantized, which adds its own quantization noise, $e_q(k)$. The resultant value M , which is generated at the output of the $\Delta\Sigma$ modulator 211, is supplied to one of the modulus inputs of the frequency divider 205.

To make the noise shaping possible, the divider modulus should not be chosen to be only the two closest integer factors, but should instead be varied between, for example, $N - M$, \dots , $N + M$. This extra modulus range is required if noise is to be pushed out in frequency, away from the VCO carrier; otherwise, the loop filter will not be able to suppress the $\Delta\Sigma$ noise. As a consequence of this extended divider modulus range, the instantaneous phase error will be increased. The $\Delta\Sigma$ -loop equations then become:

$$\begin{aligned} i_e &= K_P \left(\phi_R - \frac{\phi_o}{N + \delta N} + N_{\Delta\Sigma} \right) \\ \phi_o &= i_e Z(s) \frac{K_V}{s}, \end{aligned} \quad (2)$$

where $N + \delta N$ and $N_{\Delta\Sigma}$ represent the fractional division ratio and the $\Delta\Sigma$ -modulator noise, respectively. FIG. 4 is a graph that illustrates the output spectrum of the frequency divider 205.

FIG. 5 is a block diagram of a typical embodiment of the conventional phase detector 201. The use of first and second digital latches 501, 503 enables multiple states (not shown in FIG. 5) and, hence, an extended range of the phase detector 201. In operation, the first latch 501 controls whether a first charge pump 505 is on or off. Similarly, the second latch 503 controls whether the second charge pump 507 is on or off. The first and second charge pumps 505, 507 are connected in series, with the phase detector output current, i_e , being supplied at the connection point between the two charge pumps. The amount of phase detector output current, i_e , is related to whether none, one, or both of the first and second charge pumps 505, 507 are turned on. The amount of time that i_e is non-zero is a function of the phase difference between the two input signals, ϕ_a and ϕ_b . Each of these signals is supplied to a clock input of a respective one of the first and second latches 501, 503. The first of these signals to present a clocking edge causes the output of the corresponding latch to be asserted, which in turn, causes a corresponding one of the first and second charge pumps 505, 507 to turn on. When the clocking edge of the remaining input signal is subsequently asserted, it too causes the output of its corresponding latch to be asserted. The outputs of both the first and second latches 501, 503 are further supplied to respective inputs of a logical AND gate 509, whose output is supplied to the RESET inputs of both the first and second latches 501, 503. Consequently, when

the outputs of both latches 501, 503 are asserted, the output of the AND gate 509 will be asserted as well, thereby resetting both latches 501, 503. They are now initialized to repeat the process again for a next cycle. As a result, the output current i_e is either a positive value (being supplied by the first charge pump 505) if the first input signal ϕ_a leads the second input signal ϕ_b , or else it is a negative value (being drawn by the second charge pump 507) if the second input signal ϕ_b leads the first input signal ϕ_a .

A typical phase-detector transfer function is depicted in FIG. 6, in which the average phase detector output current, i_{e_avg} , is plotted as a function of phase difference, $\Delta\phi$. Not shown in FIG. 6 is a "dead-zone" that would be associated with the phase detector depicted in FIG. 5. The dead-zone, and ways of dealing with it, are discussed in greater detail below.

The phase detector output is often designed with charge pumps having a high-impedance off state. This high-impedance off state effectively turns the loop filter into an integrator (i.e., if the trans-impedance $Z(s)$ is capacitive). A simplified rendition of a charge pump that may be used as either of the charge pumps 505, 507 is shown in FIG. 7. In this simplified design, the current for the "down" stage is drawn by transistor 707 when the "down" signal 709 is asserted. The current for the "up" stage is supplied by the current mirror arrangement of transistors 701, 703 and 705 when the "up" signal 711 is asserted.

Referring back to FIGS. 3 and 5, when the PLL 201 is properly tracking its reference, ϕ_R , both of the phase-detector latches 501, 503 trigger almost simultaneously, due to the fact that the phase difference between the two input signals becomes very small. The reset signal immediately resets the first and second latches 501, 503 and, as a consequence, only short spikes appear at the latch outputs, too fast to turn on the respective first and second charge pumps 505, 507.

In fact, even when there is a small phase error (i.e., a tracking error), the first and second latches 501, 503 will reset too fast for the charge pumps 505, 507

to react. Consequently, the phase-detector transfer function will be characterized by a small dead-band (low-gain region) around the origin. A common technique to combat this dead-band is to utilize a delay circuit 801, which adds a delay δT to the reset signal, as illustrated in FIG. 8. With this extra delay, the up and down pulses will each be long enough to activate the charge pumps, thereby eliminating the dead-band.

Despite the use of the delay circuit 801 as described above, the $\Delta\Sigma$ -based fractional-N PLLs reported in the literature often have inferior noise performance compared to their integer-divide counterparts. This has prevented their use in demanding applications, like cellular phones. The origin of this excess noise has conventionally been attributed to the $\Delta\Sigma$ -modulator noise, even though, as shown in FIG. 2, the noise can be made to fall outside the loop bandwidth.

Consequently, it is desirable to provide components and techniques for improving the noise performance of fractional-N PLLs.

SUMMARY

It should be emphasized that the terms "comprises" and "comprising", when used in this specification, are taken to specify the presence of stated features, integers, steps or components; but the use of these terms does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

In accordance with one aspect of the present invention, the foregoing and other objects are achieved in a phase detector that comprises a first input that receives a first signal; a second input that receives a second signal; a comparison circuit that generates an output signal as a function of a phase difference between the first signal and the second signal. The output signal may be in the form of an output current, or alternatively an output voltage. In order to provide linear performance during steady-state operation, the phase detector further comprises an operating point circuit that maintains an operating point of the phase detector such

that for a predetermined range of both positive and negative phase differences between the first and second signals, the output signal is generated as a substantially linear function of the phase difference between the first and second signals.

5 The operating point circuit may assume any of a number of alternative embodiments. For example, where the phase detector is employed in a phase-locked loop, whereby an output frequency of the phase-locked loop is a function of the output signal of the phase detector, the operating point circuit may leak a predefined portion of the output signal so as to prevent the leaked output signal
10 from influencing the output frequency of the phase-locked loop.

 Alternatively, where the output signal is an output current and the comparison circuit comprises a first circuit that asserts a first charge pump control signal in response to an edge of the first signal; a second circuit that asserts a second charge pump control signal in response to an edge of the second signal; a
15 first charge pump that contributes a positive current to the output current in response to assertion of the first charge pump control signal; a second charge pump that contributes a negative current to the output current in response to assertion of the second charge pump control signal; and reset logic that supplies a reset signal to each of the first and second circuits in response to both of the first
20 and second charge pump control signals being asserted, the operating point circuit may comprise a delay circuit that delays at least one of the first and second charge pump control signals from being supplied to the reset logic, wherein a length of time that it takes the first charge pump control signal to be supplied to the reset logic is not equal to the length of time that it takes the second charge pump control
25 signal to be supplied to the reset logic. In this alternative, the delay circuit may be designed to delay only one of the first and second charge pump control signals from being supplied to the reset logic. Alternatively, it may delay both the first and second charge pump control signals from being supplied to the reset logic.

5 In yet another alternative, where the output signal is an output voltage and the comparison circuit comprises a first circuit that asserts a first voltage generator control signal in response to an edge of the first signal; a second circuit that asserts a second voltage generator control signal in response to an edge of the second
10 signal; a first voltage generator that contributes a positive voltage to the output voltage in response to assertion of the first voltage generator control signal; a second voltage generator that contributes a negative voltage to the output voltage in response to assertion of the second voltage generator control signal; and reset logic that supplies a reset signal to each of the first and second circuits in response to both of the first and second voltage generator control signals being asserted, the operating point circuit may comprise a delay circuit that delays at least one of the first and second voltage generator control signals from being supplied to the reset logic, wherein a length of time that it takes the first voltage generator control signal to be supplied to the reset logic is not equal to the length of time that it takes
15 the second voltage generator control signal to be supplied to the reset logic. In this alternative, the delay circuit may be designed to delay only one of the first and second voltage generator control signals from being supplied to the reset logic. Alternatively, it may delay both the first and second voltage generator control signals from being supplied to the reset logic.

20 In yet another alternative embodiment in which the phase detector is employed in a phase-locked loop, linear operation of the phase detector may be achieved by including, in the phase-locked loop one or more circuit elements that leak a predefined portion of at least one of a phase detector output signal and a frequency control signal that controls a controllable oscillator circuit (e.g., a
25 voltage controlled oscillator or current controlled oscillator) so as to prevent the leaked output signal from influencing the output frequency of the phase-locked loop. For example, such leakage may be designed to be performed by one or more circuit elements in the loop filter that leak a predefined portion of the phase detector output signal.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and advantages of the invention will be understood by reading the following detailed description in conjunction with the drawings in which:

- FIG. 1 is a block diagram of a conventional integer-divide phase-locked
5 loop;
- FIG. 2 is a graph depicting a typical $\Delta\Sigma$ noise density distribution;
- FIG. 3 is a block diagram of an exemplary embodiment of a $\Delta\Sigma$ fractional-
N PLL;
- FIG. 4 is a graph that illustrates the output spectrum of a frequency
10 divider;
- FIG. 5 is a block diagram of a typical embodiment of the conventional
phase detector;
- FIG. 6 is a graph of a typical phase-detector transfer function;
- FIG. 7 is a block diagram of a simplified rendition of a charge pump that
15 may be used as either of the charge pumps in a phase detector;
- FIG. 8 is a block diagram of a conventional digital phase detector that uses
a delay circuit to add a symmetric delay to the reset signal;
- FIG. 9 is a graph of a phase-detector transfer function;
- FIG. 10 is a graph of the noise density spectrum at the output of a
20 conventional PLL;
- FIG. 11 depicts a graph of a charge-pump transfer function;
- FIG. 12(a) depicts a linear dead-band-free digital phase detector in which a
delay circuit is placed at the "up" input of the logical AND gate;
- FIG. 12(b) depicts a linear dead-band-free digital phase detector that is
25 arranged such that a delay circuit is placed at the "down" input of the logical AND
gate ; and
- FIG. 12(c) depicts a linear dead-band-free digital phase detector that is
arranged such that a first delay circuit is placed at the "up" input of the logical

AND gate , and a second delay circuit is placed at the "down" input of the logical AND gate.

DETAILED DESCRIPTION

5 The various features of the invention will now be described with respect to the figures, in which like parts are identified with the same reference characters.

A careful investigation by the present inventors has revealed that, even when the $\Delta\Sigma$ -modulator noise is designed to fall outside the loop passband, a higher-than-expected PLL phase noise is obtained. A further analysis by the present inventors has shown that this excess noise can be attributed to charge-pump asymmetry (e.g., due to transistor mismatches in the charge pump - see, for example, FIG. 7). This asymmetry can be seen in FIG. 9, which shows a graph of a phase-detector transfer function. In particular, it can be seen that the rate of change in the average PLL output current (i_{e_avg}) is different for positive phase differences than it is for negative phase differences. This asymmetry causes a fraction of the $\Delta\Sigma$ -modulator noise to be rectified by the charge pump (i.e., an even-order nonlinearity). This nonlinear process centers the rectified $\Delta\Sigma$ -modulator noise around DC (zero frequency) and at twice its bandwidth. This can be seen in FIG. 10, which is a graph of the noise density spectrum at the output of a conventional PLL. Loop transfer is indicated by a dotted line 1001 and down-converted noise is indicated by a dot-dashed line 1003. As the figure shows, noise generated at frequencies that normally fall outside the loop bandwidth are folded back into the loop bandwidth due to rectification. This, in turn, modulates the VCO, thereby resulting in excess VCO phase noise. This rectification process has always been present in charge-pump-based phase detectors. It is, however, the use of $\Delta\Sigma$ -modulators that aggravates this problem because $\Delta\Sigma$ -modulators cause a much larger instantaneous phase error (since they shape the fractional-N spurious tones to contain more high-frequency components) than regular integer-N, or non- $\Delta\Sigma$ -modulator fractional-N, loops. When the frequency synthesizer PLL is used to

10
15
20
25

generate phase or frequency modulation, for example in a GSM transmitter, problems with the error-signal magnitude may be further aggravated.

The present invention solves the charge-pump asymmetry problem by shifting the operating point of the phase-detector charge pumps so that both positive and negative phase differences will keep the charge-pump operating in a linear region. FIG. 11 depicts a charge-pump transfer function. It can be seen that by shifting the operating point to, for example, a steady state point 1101, the phase error can be made small enough so as not to traverse the nonlinearity at the origin 1103. By staying away from the origin 1103, only one segment of the (mostly) piece-wise linear charge-pump transfer will be active and a much more linear phase-detector response is achieved. When a larger error occurs, for example due to a frequency change, the phase detector works in the normal fashion. Only during locked conditions will the operating-point offset be significant.

A phase-detector offset can be implemented in any of a number of alternative ways, and the particular way selected is not essential to the invention. In one embodiment, this is achieved by adding a constant leakage current in the PLL, for example, in the loop filter $Z(s)$. It is, however, desirable to have this leakage current be independent of the loop filter.

In an alternative embodiment, the dead-band delay is shifted so that it acts only on one of the two latch outputs. For example, FIG. 12(a) depicts a linear dead-band-free digital phase detector 1200 in which a delay circuit 1201 is interposed between the "up" signal and a first input of the logical AND gate 1203.

In an alternative embodiment, shown in FIG. 12(b), a linear dead-band-free digital phase detector 1225 is arranged such that a delay circuit 1205 is interposed between the "down" signal and a second input of the logical AND gate 1203.

In yet another alternative embodiment, shown in FIG. 12(c), a linear dead-band-free digital phase detector 1250 is arranged such that a first delay circuit 1201 is interposed between the "up" signal and the first input of the logical AND

gate 1203, and a second delay circuit 1205 is interposed between the "down" signal and the second input of the logical AND gate 1203. In this embodiment, the delay imparted by the first delay circuit 1201 should not be equal to the delay imparted by the second delay circuit 1203.

5 In each of the alternative embodiments shown in FIGS. 12(a), 12(b) and 12(c), the delay is asymmetric with respect to the "up" and "down" signals supplied to the logical AND gate that generates the reset signal for the phase detector. By letting the delay asymmetry be close to, or larger than, M/f_0 , (i.e., an amount of time equal to M cycles of the VCO output frequency) all $\Delta\Sigma$ noise
10 will be confined to one side of the phase-detector output-current zero crossing. The delay will cause f_R and f_0 to have a constant phase offset corresponding to the delay asymmetry, but this is not a problem in typical frequency synthesizer applications.

 The invention has been described with reference to a particular
15 embodiment. However, it will be readily apparent to those skilled in the art that it is possible to embody the invention in specific forms other than those of the preferred embodiment described above. This may be done without departing from the spirit of the invention.

 For example, phase-locked loops have been illustrated that employ voltage
20 controlled oscillators. However, those skilled in the art will recognize that this aspect is not essential to the invention, and that the inventive concepts relating to phase detection can also be employed in phase-locked loops that utilize current controlled oscillators instead of voltage controlled oscillators, and that in each case, these components can be considered to be a circuit that generates a phase-
25 locked loop output signal that has a frequency that is controlled by a frequency control signal generated by a loop filter.

 Furthermore, the illustrated embodiments described above employ charge pumps, and generate an output current that varies as a substantially linear function of the phase difference between two signals. However, alternative embodiments of

the invention can also be devised to generate an output voltage rather than an output current, wherein the output voltage varies as a substantially linear function of the phase difference between the two signals. In such cases, voltage generators rather than charge pumps can be employed. The output voltage can serve as the source signal for controlling a VCO in a phase-locked loop, or the output voltage can alternatively be converted to a varying current for those embodiments that utilize a current controlled oscillator instead of a VCO.

Thus, the preferred embodiment is merely illustrative and should not be considered restrictive in any way. The scope of the invention is given by the appended claims, rather than the preceding description, and all variations and equivalents which fall within the range of the claims are intended to be embraced therein.

WHAT IS CLAIMED IS:

1. A phase detector, comprising:
 - a first input that receives a first signal;
 - a second input that receives a second signal;
 - 5 a comparison circuit that generates an output signal that is a function of a phase difference between the first signal and the second signal; and
 - an operating point circuit that maintains an operating point of the phase detector such that for a predetermined range of both positive and negative phase differences between the first and second signals, the output signal is generated as a
 - 10 substantially linear function of the phase difference between the first signal and the second signal.
2. The phase detector of claim 1, wherein:
 - the phase detector is employed in a phase-locked loop, whereby an output
 - frequency of the phase-locked loop is a function of the output signal of the phase
 - 15 detector; and
 - and the operating point circuit leaks a predefined portion of the output signal so as to prevent the leaked output signal from influencing the output frequency of the phase-locked loop.
3. The phase detector of claim 1,
 - 20 wherein the output signal is an output current; and
 - wherein the comparison circuit comprises:
 - a first circuit that asserts a first charge pump control signal in
 - response to an edge of the first signal;
 - a second circuit that asserts a second charge pump control signal in
 - 25 response to an edge of the second signal;

a first charge pump that contributes a positive current to the output current in response to assertion of the first charge pump control signal;

a second charge pump that contributes a negative current to the output current in response to assertion of the second charge pump control signal;

5 and

reset logic that supplies a reset signal to each of the first and second circuits in response to both of the first and second charge pump control signals being asserted,

and wherein the operating point circuit comprises:

10 a delay circuit that delays at least one of the first and second charge pump control signals from being supplied to the reset logic, wherein a length of time that it takes the first charge pump control signal to be supplied to the reset logic is not equal to the length of time that it takes the second charge pump control signal to be supplied to the reset logic.

15 4. The phase detector of claim 3, wherein the delay circuit delays only one of the first and second charge pump control signals from being supplied to the reset logic.

20 5. The phase detector of claim 3, wherein the delay circuit delays both the first and second charge pump control signals from being supplied to the reset logic.

6. The phase detector of claim 1,
wherein the output signal is an output voltage; and
wherein the comparison circuit comprises:

25 a first circuit that asserts a first voltage generator control signal in response to an edge of the first signal;

a second circuit that asserts a second voltage generator control signal in response to an edge of the second signal;

a first voltage generator that contributes a positive voltage to the output voltage in response to assertion of the first voltage generator control signal;

5 a second voltage generator that contributes a negative voltage to the output voltage in response to assertion of the second voltage generator control signal; and

10 reset logic that supplies a reset signal to each of the first and second circuits in response to both of the first and second voltage generator control signals being asserted,

and wherein the operating point circuit comprises:

15 a delay circuit that delays at least one of the first and second voltage generator control signals from being supplied to the reset logic, wherein a length of time that it takes the first voltage generator control signal to be supplied to the reset logic is not equal to the length of time that it takes the second voltage generator control signal to be supplied to the reset logic.

7. The phase detector of claim 6, wherein the delay circuit delays only one of the first and second voltage generator control signals from being supplied to the reset logic.

20 8. The phase detector of claim 6, wherein the delay circuit delays both the first and second voltage generator control signals from being supplied to the reset logic.

9. A phase-locked loop comprising:
a phase detector that comprises:
25 a first input that receives a reference clock signal;
a second input that receives a feedback signal; and

a comparison circuit that generates a phase detector output signal that is a function of a phase difference between the reference clock signal and the feedback signal;

5 a loop filter that generates a frequency control signal from the phase detector output signal;

a circuit that generates a phase-locked loop output signal that has a frequency that is controlled by the frequency control signal;

a frequency divider that generates the feedback signal from the phase-locked loop output signal; and

10 one or more circuit elements that leak a predefined portion of at least one of the phase detector output signal and the frequency control signal so as to prevent the leaked output signal from influencing the output frequency of the phase-locked loop.

15 10. The phase-locked loop of claim 9, wherein the one or more circuit elements that leak a predefined portion of at least one of the phase detector output signal and the frequency control signal comprise:

one or more circuit elements in the loop filter that leak a predefined portion of the phase detector output signal.

20 11. The phase-locked loop of claim 9, wherein the circuit that generates the phase-locked loop output signal that has a frequency that is controlled by the frequency control signal is a voltage controlled oscillator.

12. The phase-locked loop of claim 9, wherein the circuit that generates the phase-locked loop output signal that has a frequency that is controlled by the frequency control signal is a current controlled oscillator.

13. A method of detecting a phase difference between a first signal and a second signal, the method comprising:

generating an output signal that is a function of a phase difference between the first signal and the second signal; and

5 maintaining an operating point of the phase detector such that for a predetermined range of both positive and negative phase differences between the first and second signals, the output signal is generated as a substantially linear function of the phase difference between the first signal and the second signal.

14. The method of claim 13, further comprising:

10 generating a phase-locked loop output signal that has a frequency that is a function of the output signal of the phase detector; and

leaking a predefined portion of the output signal so as to prevent the leaked output signal from influencing the output frequency of the phase-locked loop output signal.

15 15. The method of claim 13,

wherein the output signal is an output current; and

wherein the step of generating the output signal that is a function of the phase difference between the first signal and the second signal comprises:

20 asserting a first charge pump control signal in response to an edge of the first signal;

asserting a second charge pump control signal in response to an edge of the second signal;

contributing a positive current to the output current in response to assertion of the first charge pump control signal;

25 contributing a negative current to the output current in response to assertion of the second charge pump control signal; and

deactivating the first and second charge pump control signals in response to both of the first and second charge pump control signals being asserted,

5 and wherein the step of maintaining the operating point of the phase detector comprises:

10 delaying at least one of the first and second charge pump control signals from affecting the deactivating step, wherein a length of time that it takes the first charge pump control signal to affect the deactivating step is not equal to the length of time that it takes the second charge pump control signal to affect the deactivating step.

16. The method of claim 15, wherein the step of delaying comprises delaying only one of the first and second charge pump control signals from affecting the deactivating step.

15 17. The method of claim 15, wherein the step of delaying comprises delaying both the first and second charge pump control signals from affecting the deactivating step.

18. The method of claim 13,
wherein the output signal is an output voltage; and
wherein the step of generating the output signal that is a function of the
20 phase difference between the first signal and the second signal comprises:
asserting a first voltage generator control signal in response to an edge of the first signal;
asserting a second voltage generator control signal in response to an edge of the second signal;
25 contributing a positive voltage to the output voltage in response to assertion of the first voltage generator control signal;

contributing a negative voltage to the output voltage in response to
assertion of the second voltage generator control signal; and

deactivating the first and second voltage generator control signals in
response to both of the first and second voltage generator control signals being
5 asserted,

and wherein the step of maintaining the operating point of the phase
detector comprises:

delaying at least one of the first and second voltage generator
control signals from affecting the deactivating step, wherein a length of time that it
10 takes the first voltage generator control signal to affect the deactivating step is not
equal to the length of time that it takes the second voltage generator control signal
to affect the deactivating step.

19. The method of claim 18, wherein the step of delaying comprises delaying
only one of the first and second voltage generator control signals from affecting
15 the deactivating step.

20. The method of claim 18, wherein the step of delaying comprises delaying
both the first and second voltage generator control signals from affecting the
deactivating step.

21. A method of generating a phase-locked loop output signal, comprising:
20 generating a phase detector output signal that is a function of a phase
difference between a reference clock signal and a feedback signal;
generating a frequency control signal from the phase detector output signal;
generating the phase-locked loop output signal that has a frequency that is
controlled by the frequency control signal;
25 using a frequency divider to generate the feedback signal from the phase-
locked loop output signal; and

leaking a predefined portion of at least one of the phase detector output signal and the frequency control signal so as to prevent the leaked output signal from influencing the output frequency of the phase-locked loop.

- 5 22. The method of claim 21, wherein the step of leaking a predefined portion of at least one of the phase detector output signal and the frequency control signal comprises:

leaking a predefined portion of the phase detector output signal in a loop filter.

ABSTRACT OF THE DISCLOSURE

A phase-locked loop includes a phase detector, a loop filter, a voltage controlled oscillator and a frequency divider arranged such that the phase detector generates a phase detector output signal as a function of a phase difference between the reference clock signal and the feedback signal; the loop filter generates a frequency control signal from the phase detector output signal; the voltage controlled oscillator generates a phase-locked loop output signal that has a frequency that is controlled by the frequency control signal; and the frequency divider generates the feedback signal from the phase-locked loop output signal.

The phase-locked loop further includes one or more circuit elements that maintain an operating point of the phase detector such that, for a predetermined range of both positive and negative phase differences between the reference clock signal and the feedback signal, the output signal is generated as a substantially linear function of the phase difference between the reference clock signal and the feedback signal.

100

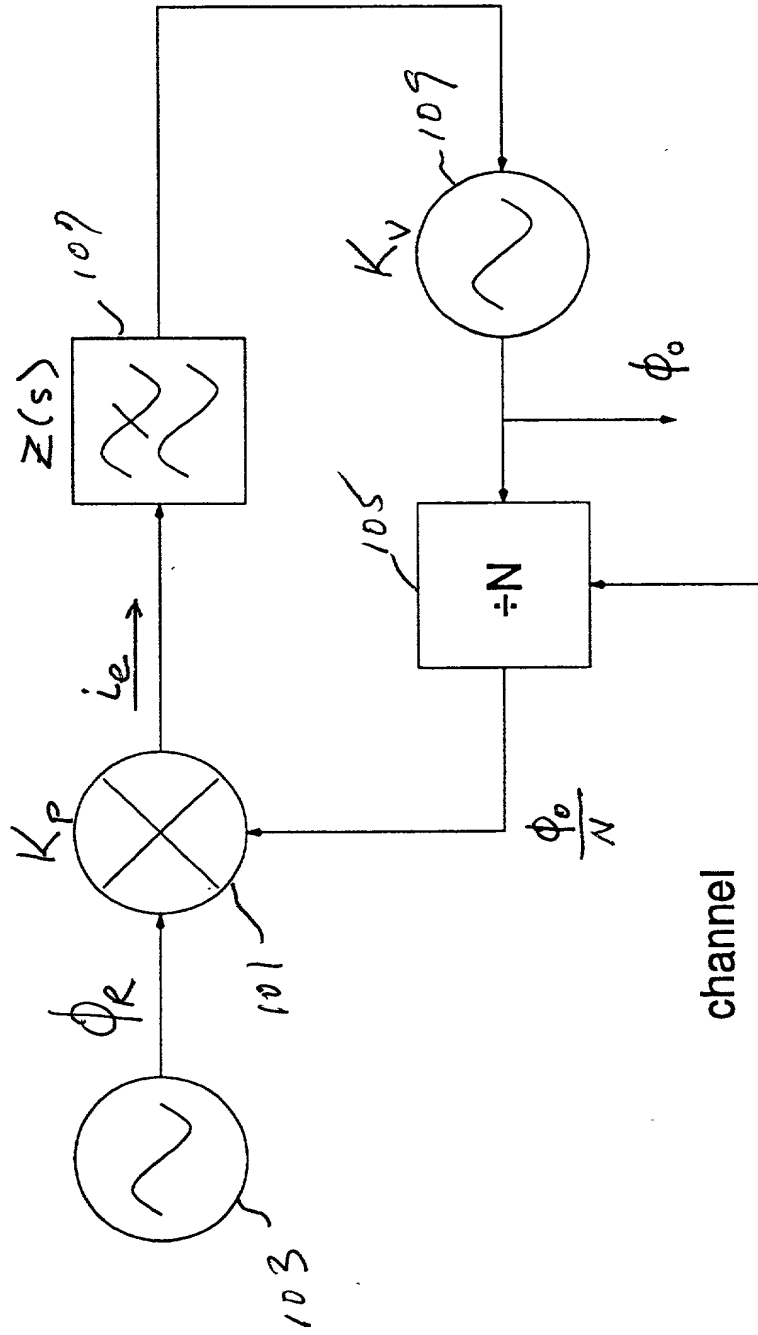


FIG. 1
(PRIOR ART)

noise density

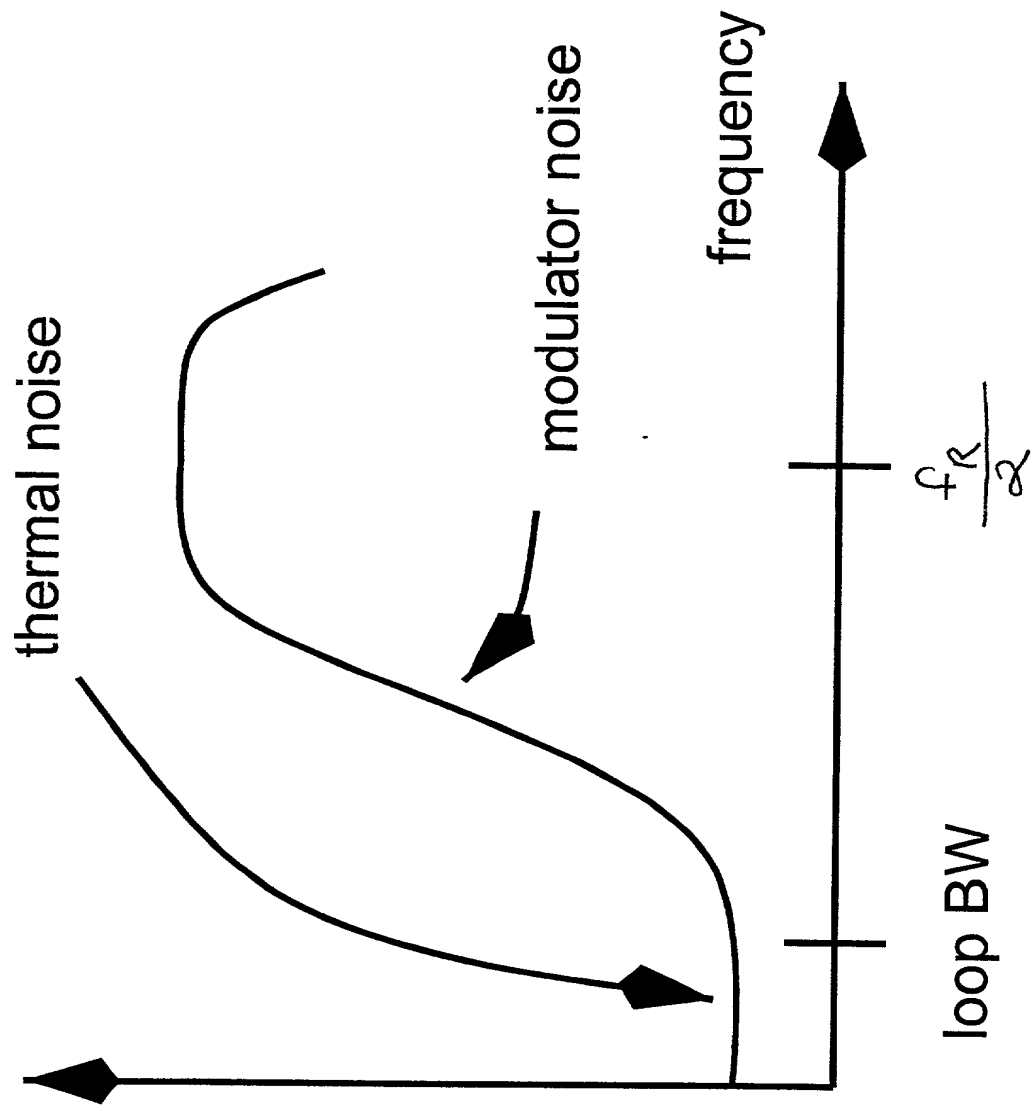


FIG. 2

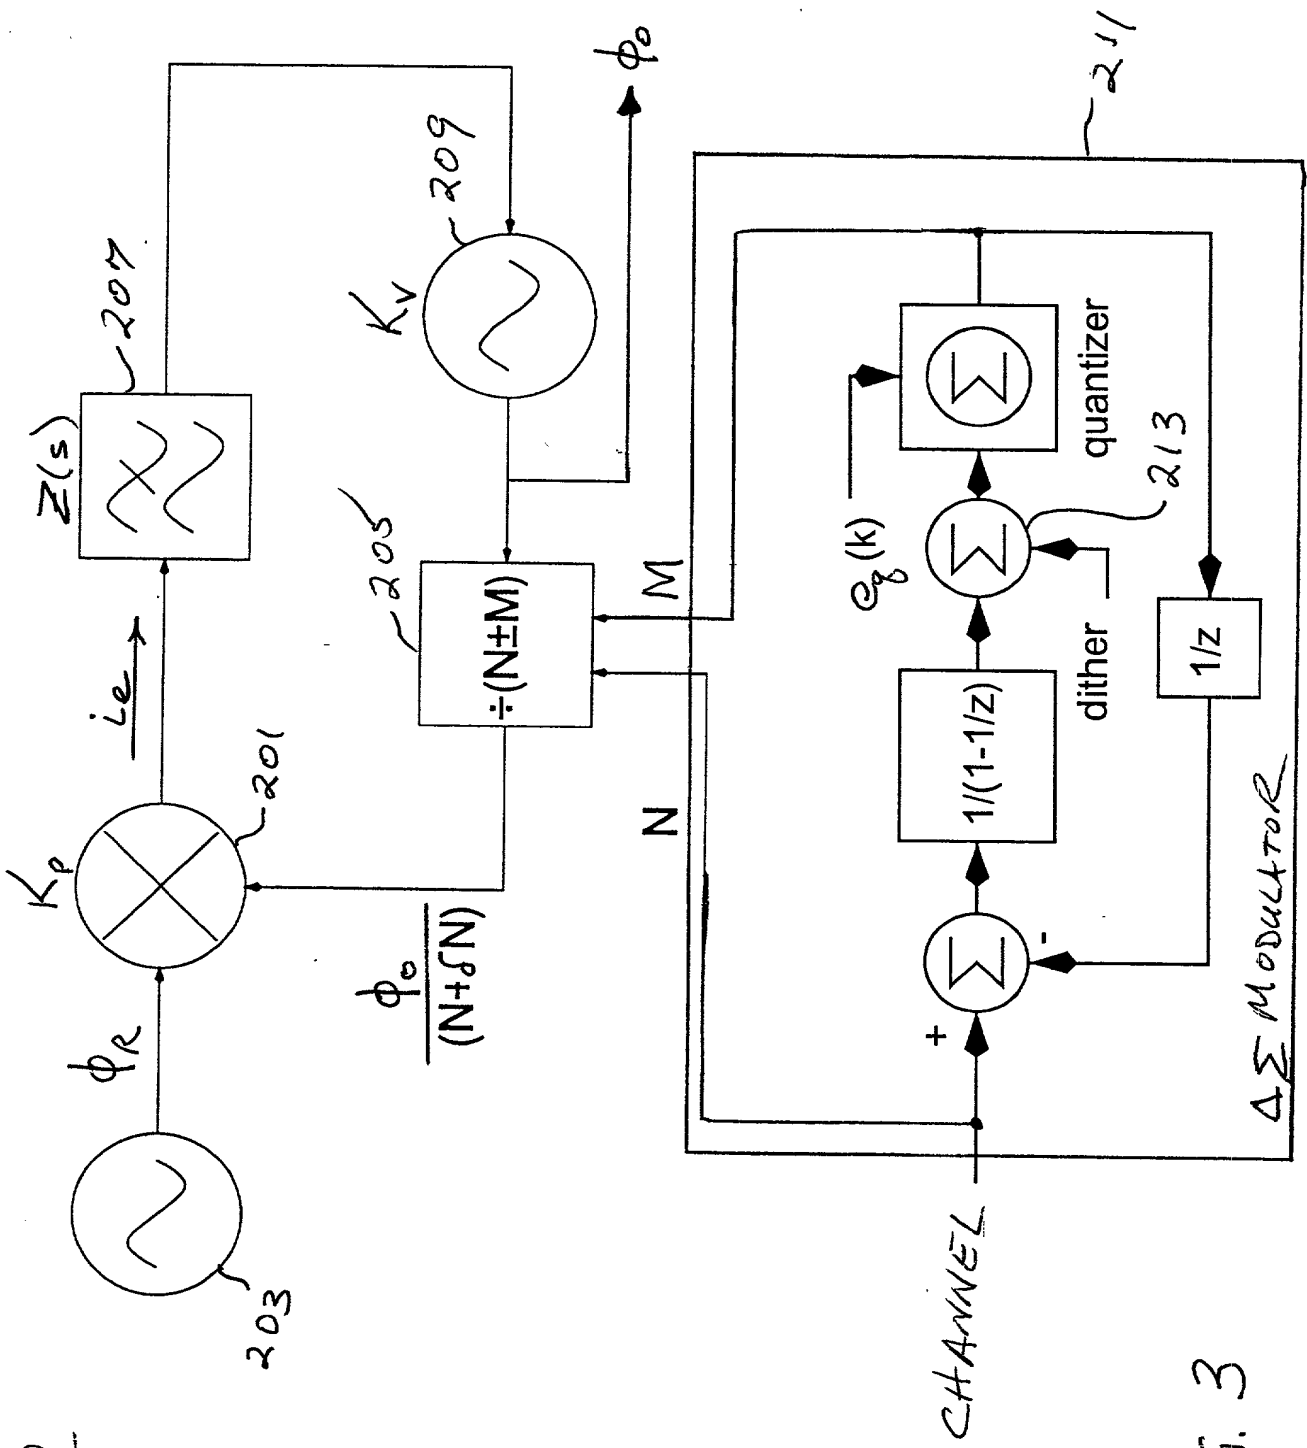


FIG. 3

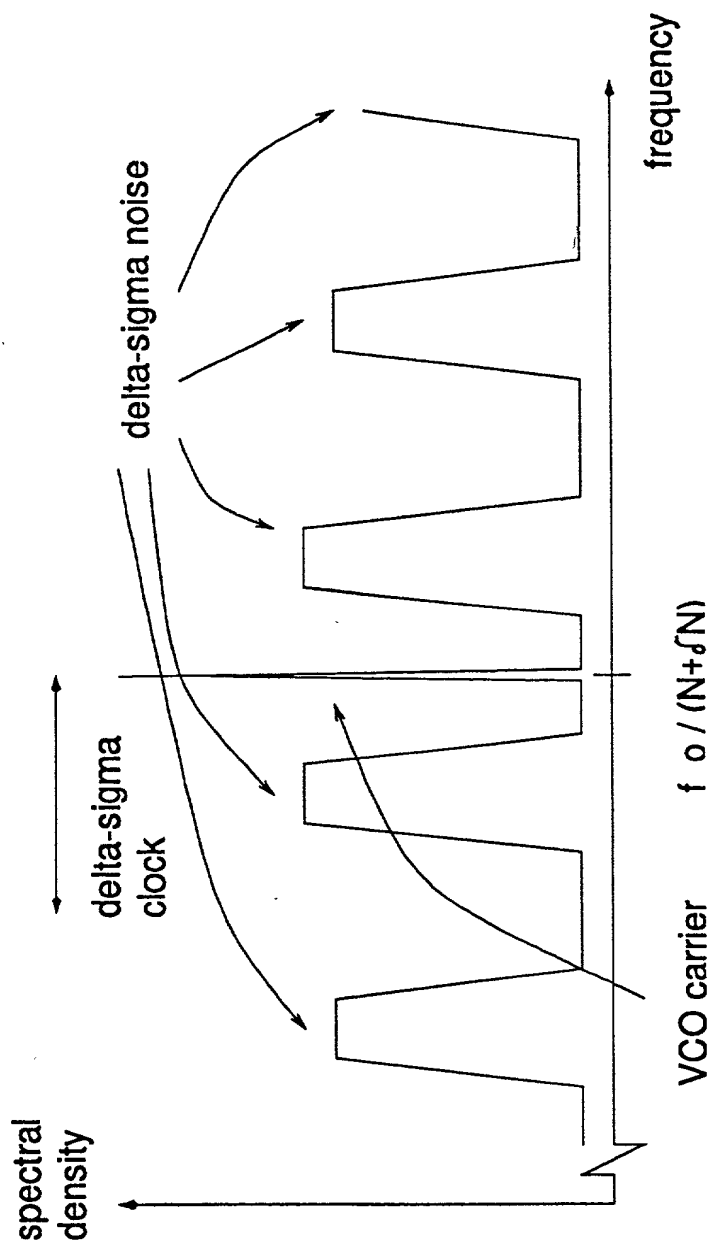


FIG. 4

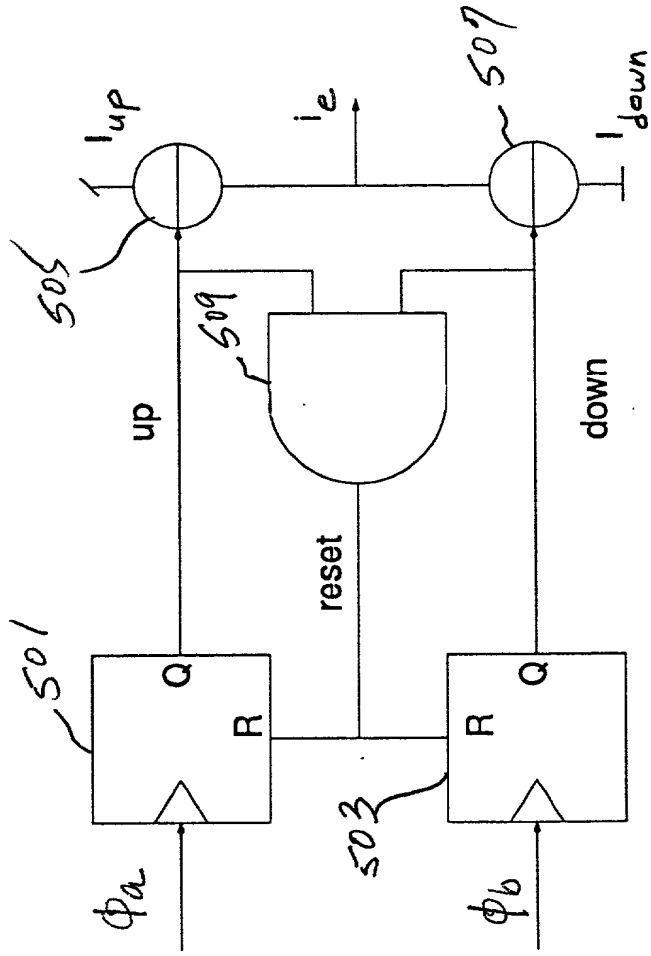


FIG. 5
(PRIOR ART)

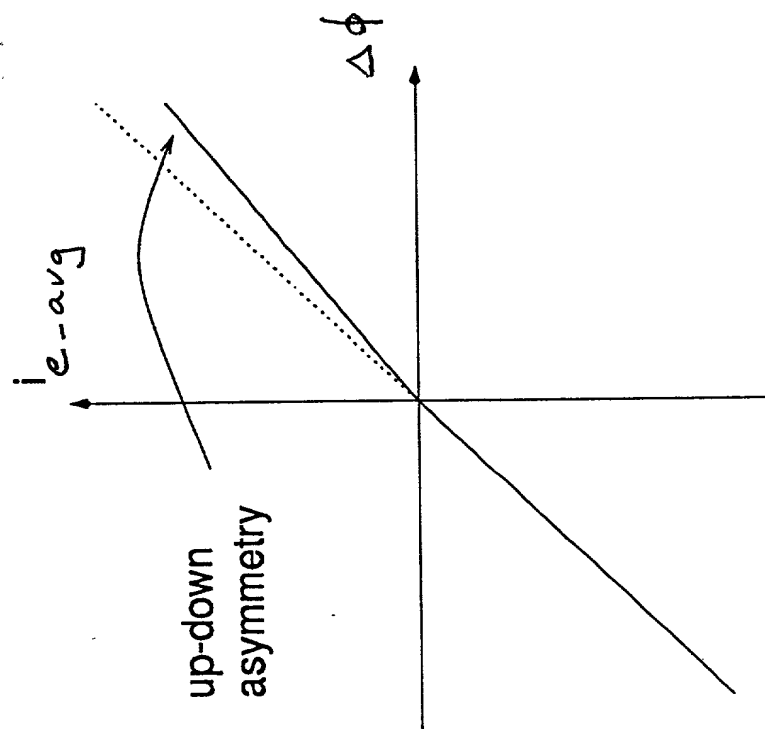


Fig. 6


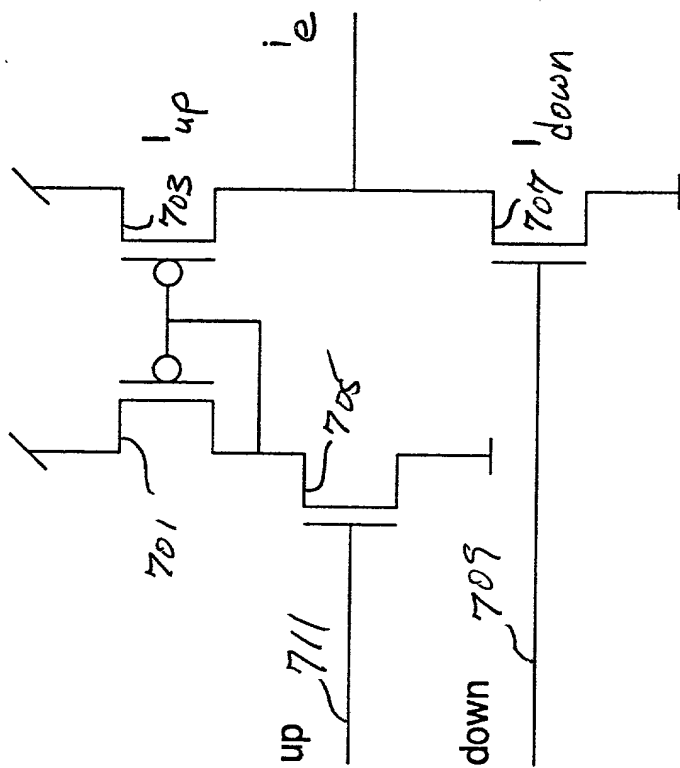


FIG. 7
(PRIORITY)

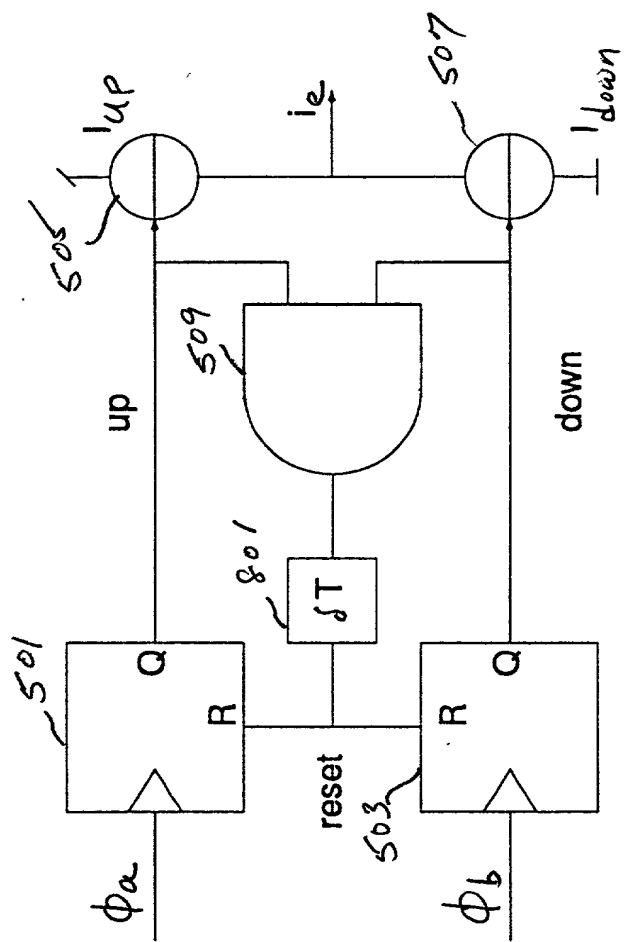

8.
9/
H

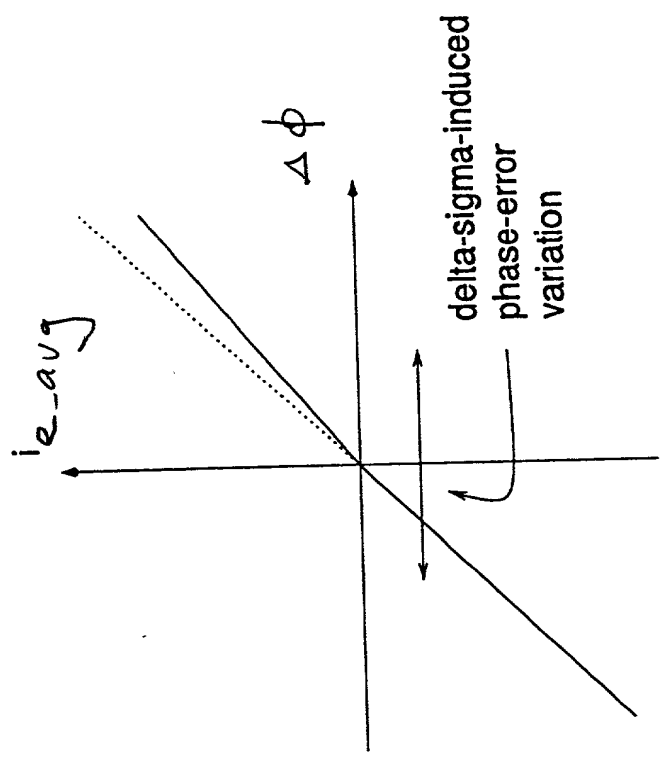


FIG. 9

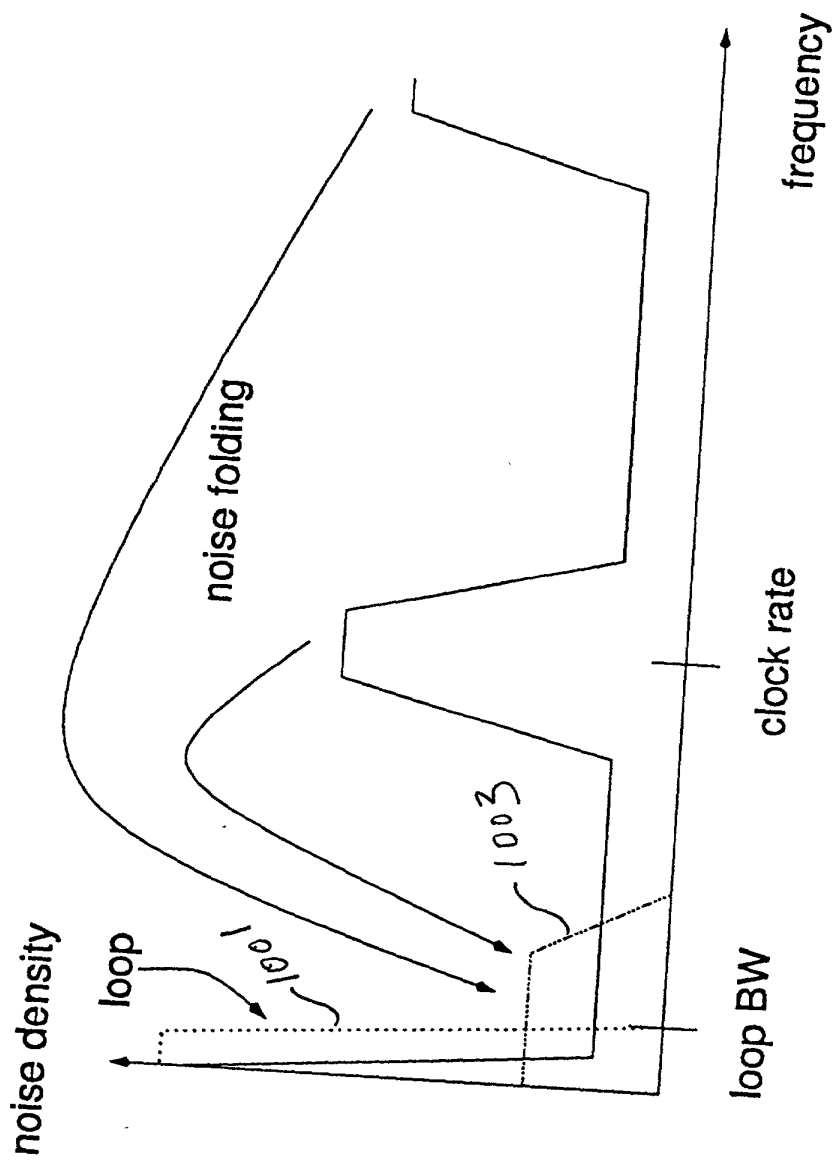


FIG. 10

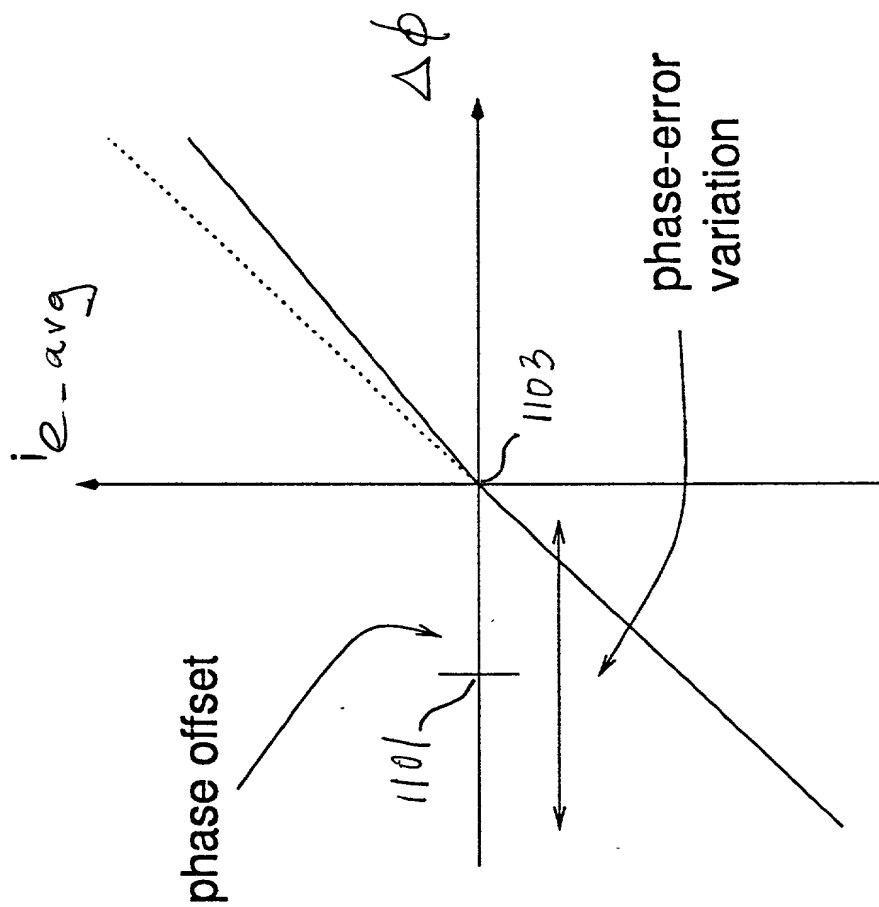


FIG. 11

1200

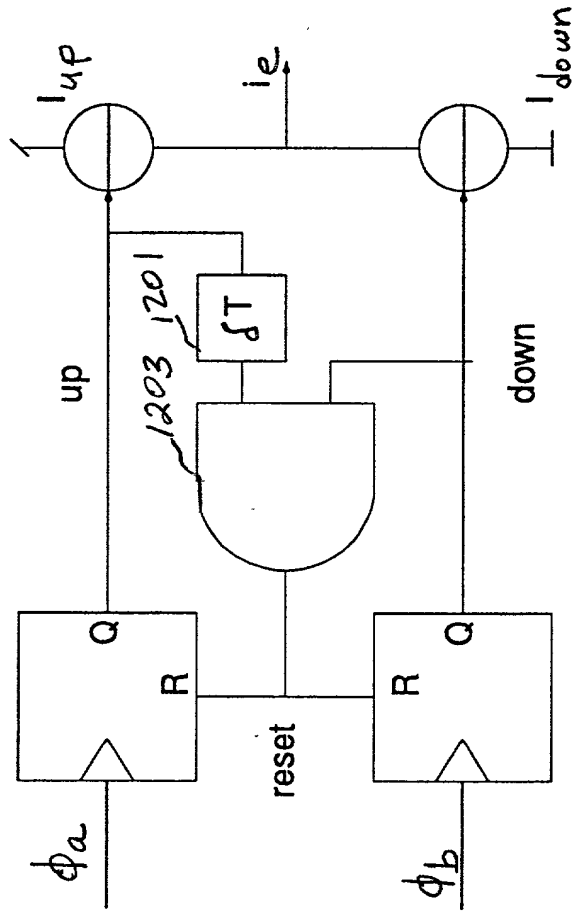


FIG. 12(a)

1225

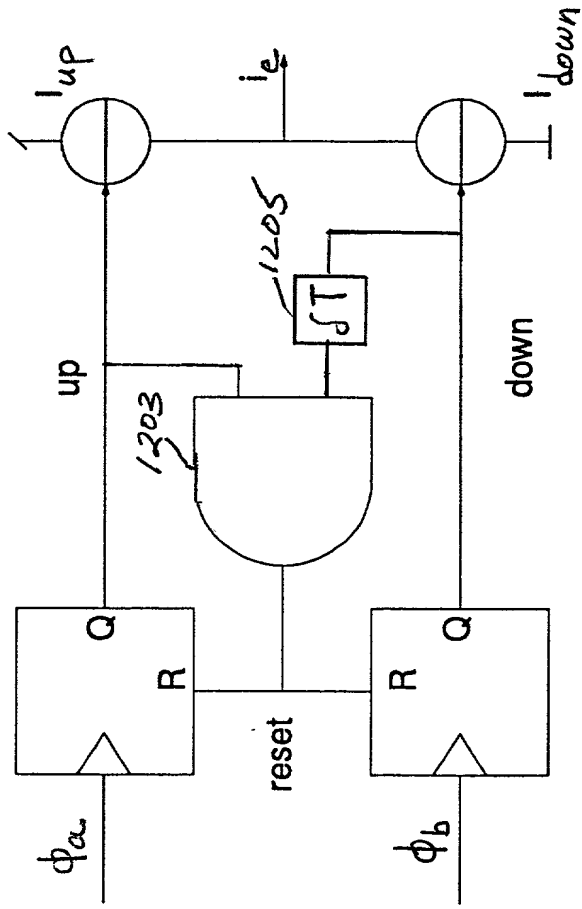


FIG. 12(b)

1250

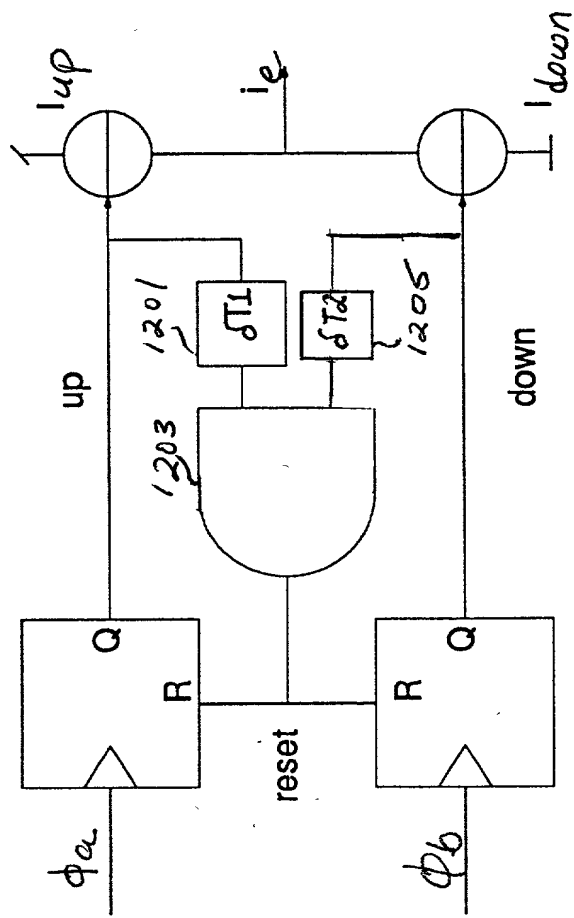


FIG. 12(c)

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR UTILITY PATENT APPLICATION**

Attorney's Docket No.

040071-134

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

LINEAR DEAD-BAND-FREE DIGITAL PHASE DETECTION

the specification of which

(check one)



is attached hereto;



was filed on _____ as

Application No. _____

and was amended on _____;
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

COMBINED DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

040071-134

COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
			YES_ NO_
			YES_ NO_

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	R. Danny Huntington	27,903	Gerald F. Swiss	30,113
Robert S. Swecker	19,885	Eric H. Weishlatt	30,505	Michael J. Ure	33,089
Platon N. Mandros	22,124	James W. Peterson	26,057	Charles F. Wieland III	33,096
Bearon S. Duffert, Jr.	22,030	Teresa Spruck Ren	30,427	Bruce T. Wieder	33,815
Norman H. Stepano	22,716	Robert E. Krebs	25,885	Todd R. Wallers	34,040
Ronald L. Grudzicki	24,970	William C. Rowland	30,888	Ronni S. Jilions	31,979
Frederick G. Michaud, Jr.	26,003	T. Gene Dillahunty	25,423	Harold R. Brown III	36,341
Alan E. Kopecki	25,813	Patrick C. Keane	32,858	Allen R. Baum	36,086
Regis R. Sluter	26,999	Bruce J. Boggs, Jr.	32,344	Steven M. du Bois	35,023
Samuel C. Miller, III	27,360	William H. Benz	25,952	Brian P. O'Shaughnessy	32,747
Robert G. Mukai	28,531	Peter K. Skiff	31,917	Kenneth B. Leffler	36,075
George A. Hoyanec, Jr.	28,223	Richard J. McGrath	29,195	Fred W. Hathaway	32,236
James A. LaBarre	28,632	Matthew L. Schneider	32,814		
H. Joseph Gess	28,510	Michael G. Savage	32,596		



21839

and:

Address all correspondence to:



21839

Ronald L. Grudzicki, Esquire
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404

Address all telephone calls to: Ronald L. Grudzicki at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	SIGNATURE	DATE
Sven MATTISSION	<i>Sven Mattisson</i>	26/5-00
RESIDENCE	CITIZENSHIP	
Östnavig 3, SE-237 36 Björred, Sweden	Swedish	
POST OFFICE ADDRESS		
Same as above		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Hans HAGBERG	<i>Hans Hagberg</i>	29/5-00
RESIDENCE	CITIZENSHIP	
Grynbadgatan 16, SE-211 33 Malmö, Sweden	Swedish	
POST OFFICE ADDRESS		
Same as above		

COMBINED DECLARATION AND POWER OF ATTORNEY		Attorney's Docket No.
		040071-134
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	SIGNATURE	DATE
Magnus NILSSON	<i>Magnus Nilsson</i>	20000529
RESIDENCE	CITIZENSHIP	
Flygelvägen 2-H, SE-224 72 Lund, Sweden	Swedish	
POST OFFICE ADDRESS		
Same as above		
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF EIGHTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF NINTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF TENTH JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		